



MBR2035CT THRU MBR20200CT

20.0 AMPS. Schottky Barrier Rectifiers



Voltage Range
35 to 200 Volts
Current
20.0 Amperes


Features

- ✦ Plastic material used carries Underwriters Laboratory Classifications 94V-0
- ✦ Metal silicon junction, majority carrier conduction
- ✦ Low power loss, high efficiency
- ✦ High current capability, low forward voltage drop
- ✦ High surge capability
- ✦ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- ✦ Guardring for overvoltage protection
- ✦ High temperature soldering guaranteed: 260°C/10 seconds, 0.25"(6.35mm) from case

Mechanical Data

- ✦ Cases: JEDEC TO-220 molded plastic
- ✦ Terminals: Leads solderable per MIL-STD-750, Method 2026
- ✦ Polarity: As marked
- ✦ Mounting position: Any
- ✦ Mounting torque: 5 in. - lbs. max
- ✦ Weight: 0.08 ounce, 2.24 grams

TO-220

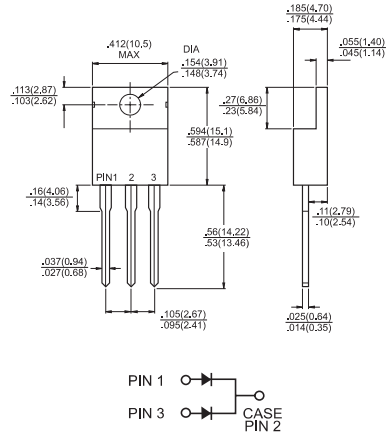

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

| Type Number | Symbol | MBR 2035CT | MBR 2045CT | MBR 2050CT | MBR 2060CT | MBR 20100CT | MBR 20200CT | Units |
|---|-----------------|----------------------|------------------------------|------------|------------------------------|------------------------------|-------------|------------------|
| Maximum Recurrent Peak Reverse Voltage | V_{RRM} | 35 | 45 | 50 | 60 | 100 | 200 | V |
| Maximum RMS Voltage | V_{RMS} | 24 | 31 | 35 | 42 | 70 | 140 | V |
| Maximum DC Blocking Voltage | V_{DC} | 35 | 45 | 50 | 60 | 10 | 200 | V |
| Maximum Average Forward Rectified Current at $T_C=135^\circ\text{C}$ | $I_{(AV)}$ | 20 | | | | | | A |
| Peak Repetitive Forward Current (Rated V_R , Square Wave, 20KHz) at $T_C=135^\circ\text{C}$ | I_{FRM} | 20.0 | | | | | | A |
| Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method) | I_{FSM} | 150 | | | | | | A |
| Peak Repetitive Reverse Surge Current (Note 1) | I_{RRM} | 1.0 | 0.5 | | | 1.0 | A | |
| Maximum Instantaneous Forward Voltage at (Note 2) IF=10A, TC=25°C IF=10A, TC=125°C IF=20A, TC=25°C IF=20A, TC=125°C | V_F | 0.57 0.84 0.72 | 0.80 0.70 0.95 0.85 | | 0.85 0.75 0.95 0.85 | 0.99 0.87 1.23 1.10 | V | |
| Maximum Instantaneous Reverse Current @ $T_C=25^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_C=125^\circ\text{C}$ | I_R | 0.1 15.0 | 0.15 150.0 | | | 1.0 50 | mA mA | |
| Voltage Rate of Change, (Rated V_R) | dV/dt | 10,000 | | | | | | V/ μs |
| Typical Junction Capacitance | C_j | 400 | 320 | | | | pF | |
| Typical Thermal Resistance Per Leg (Note 3) | $R_{\theta JC}$ | 1.0 | | | 2.0 | | °C/W | |
| Operating Junction Temperature Range | T_J | -65 to +150 | | | | | | °C |
| Storage Temperature Range | T_{STG} | -65 to +175 | | | | | | °C |

Notes: 1. 2.0us Pulse Width, $f=1.0$ KHz

2. Pulse Test: 300us Pulse Width, 1% Duty Cycle

3. Thermal Resistance from Junction to Case Per Leg, with Heatsink Size (4"x6"x0.25") Al-Plate.

RATINGS AND CHARACTERISTIC CURVES (MBR2035CT THRU MBR20200CT)

FIG.1- FORWARD CURRENT DERATING CURVE

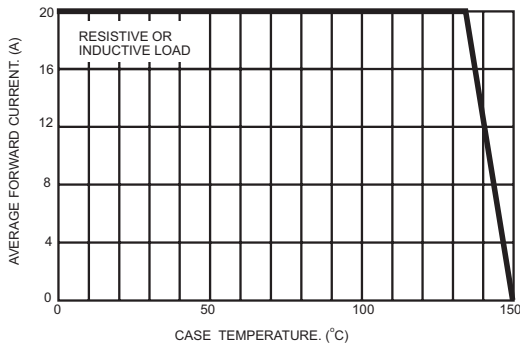


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

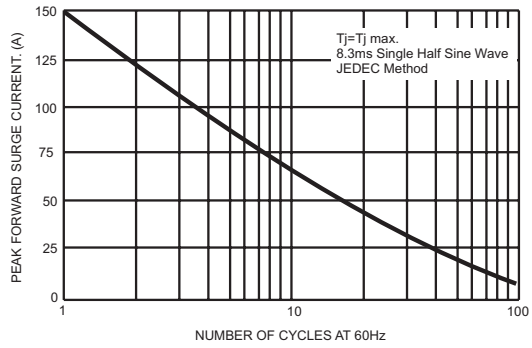


FIG.3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG

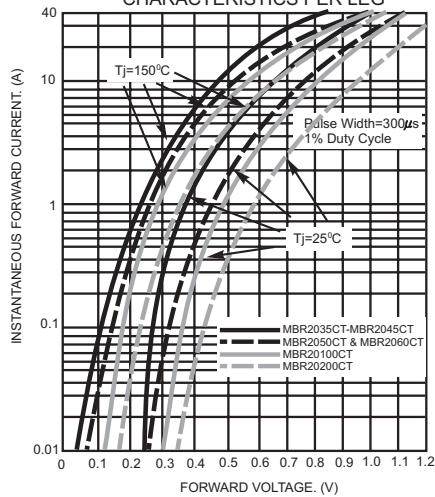


FIG.4- TYPICAL REVERSE CHARACTERISTICS PER LEG

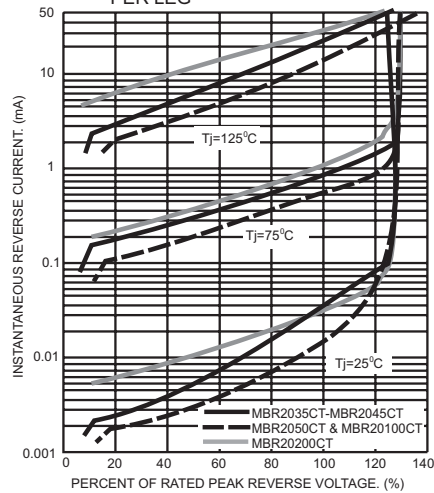


FIG.5- TYPICAL JUNCTION CAPACITANCE PER LEG


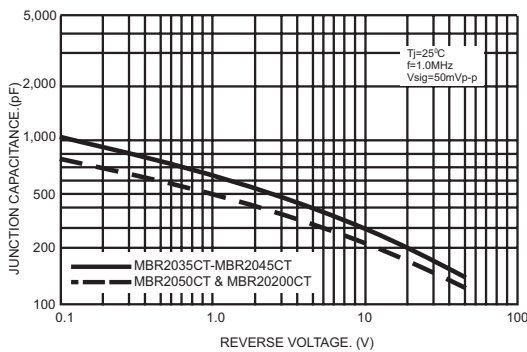


FIG.6- TYPICAL TRANSIENT THERMAL IMPEDANCE PER LEG

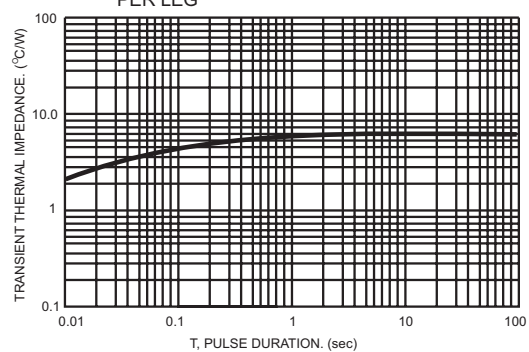

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.